

THE ROBUSTO



▶ ROBUSTO – EXTREMELY DURABLE, ROBUST LAMINATE FLOORING

There are situations in life where one needs a thick skin. Where one has to be very resilient and tough. Which is why ROBUSTO is also the perfect floor for extreme levels of use. With its high-density, 12-mm thick fibreboard and an especially wear-resistant surface, it can cope with pretty much anything to which it is exposed. Even if used for commercial purposes. Its CLIC tongue-and-groove connection system will never disappoint in any situation as it was specially developed to hold up under the highest pressure.

▶ FEATURES

- AC5 grade material
- Dimension – 1375*188*12mm
- V Groove
- These panels have a special surface structure.
- Robusto flooring is covered by a warranty lasting 30 years (for residential use) or 5 years (for commercial use)

▶ TEST	▶ CHARACTERISTICS	▶ TEST METHOD
Formaldehyde emission	< 0.05 ppm	EN 717-1
Surface stain resistance	Grade 5, no visible changes to surface	EN 438-2, 15
Lightfastness	≥ Level 6 Blue Wool Scale ≥ Level 4 Grey Scale	EN ISO 105-B02 EN 20 105-A02
Resistance to cigarette embers	Grade 4, no visible changes to surface	EN 438-2, 18
Fire resistance	Ignites with difficulty, at least Cfl-s1	EN 13501-1
Height difference between connected elements	Average: ≤ 0.10 mm max: ≤ 0.15 mm	EN 13329
Edge straightness (bend)	≤ 0.3 mm/m	EN 13329
Openings between connected elements	Average: ≤ 0.15 mm max: ≤ 0.20 mm	EN 13329
Static indentation	< 0.01 mm - no visible changes, Impression in test	
Strength	with straight steel cylinder of 11,3 mm diameter Thermal conductivity (W / (m × K))	EN 433 Overall heat transfer coefficient Thermal resistance ((m ² × K) / W)
12	0.14	0.09






HARBOUR OAK DARK



PHALSBOURG OAK

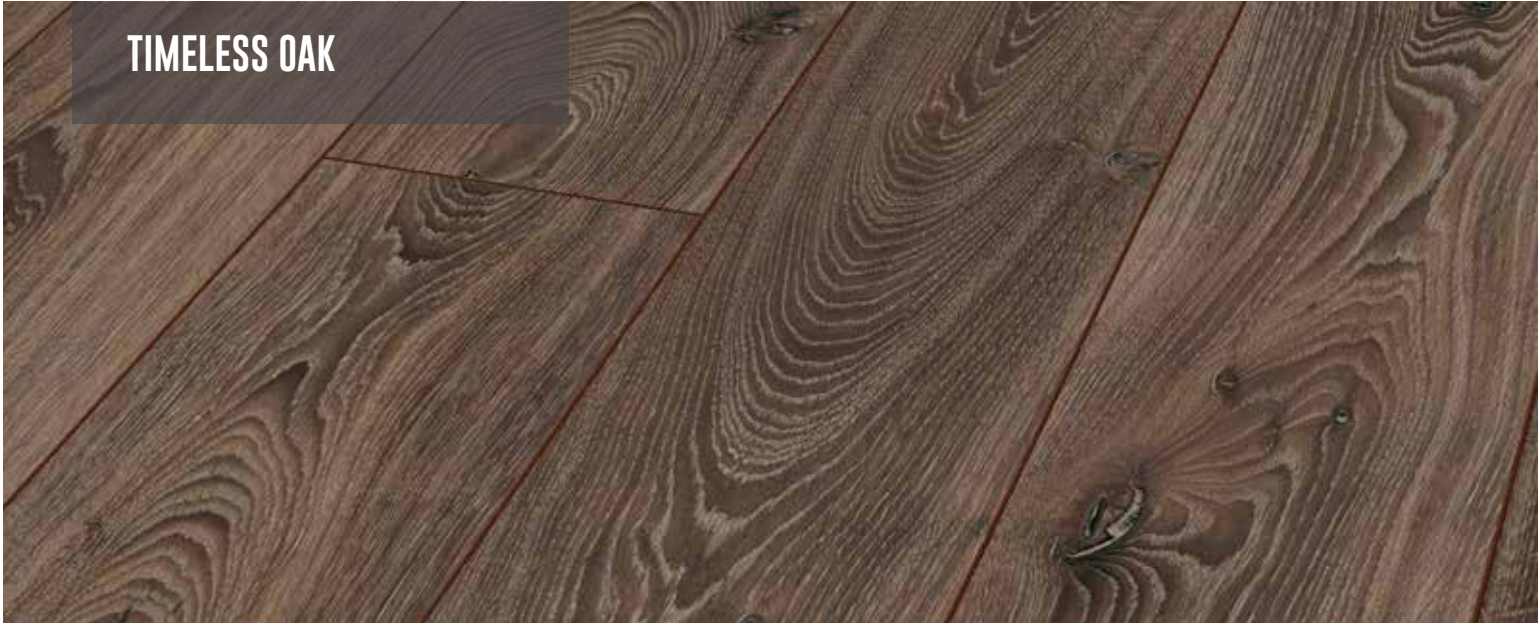

TIMELESS OAK



SAVERNA OAK



ATLAS OAK COFFEE



ATLAS OAK ANTHRACITE